



**Technically Superior
Budget Friendly**

Gasket Free Plate Heat Exchangers

www.aircooledoilcoolers.com
www.acefluidpower.com

Water Cooled Oil Cooling Solutions

Our state-of-the-art Gasket Free Plate Heat Exchanger (GFPT) is engineered to deliver **high-performance heat transfer** in a compact and robust design. Constructed from a series of thin, corrugated plates, the unit is copper-fused in a vacuum furnace to ensure **superior strength, durability, and leak-proof sealing** under **high-pressure conditions**.

The specially designed corrugated plate pattern induces **enhanced turbulence** within the flow channels, significantly improving heat transfer efficiency while maintaining optimal performance.

Ideal for a wide range of applications, the GFPT is perfectly suited for cooling and heating of **hydraulic oil, lubricating oil, water, air, steam, gases, and other industrial fluids**—making it a reliable and efficient solution for modern thermal management needs.

BENEFITS :



Economical



No Gaskets
No Leaks



Compact



High Pressure



Low
Maintenance




High Thermal
Efficiency

RANGE :

Our standard range of Gasket Free Plate Heat Exchangers ensures you competitive pricing, high quality and short delivery times

Max. Working Temperature - Upto 225°C

Max. Working Pressure - 31 Bar

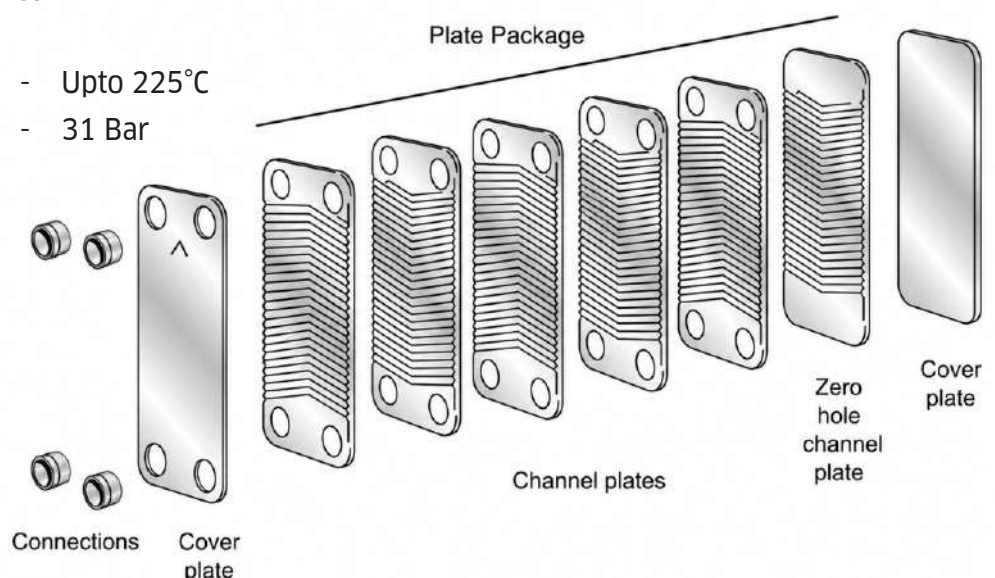

Quick Selection Guide

Selection Chart for Hydraulic Oil Coolers based on (ISO VG 32 to ISO VG 68)*

Water Flow Rate = Oil Flow rate | Water Entering Temperature = 32°C | System Oil Temperature = 55°C
Based on Power Pack Efficiency: 70%

Hydraulic Power Pack Motor		Heat Dissipation		OIL FLOW (LPM)													
HP	kW	kW	kcal / h	2	5	10	20	40	60	80	100	120	140	180	220	240	280
< 3	< 2.2	0.7	568	CA-1020	CA-1020	CA-1020	CA-1020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
5	3.7	1.1	955		CA-1020	CA-1020	CA-1020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
8	5.5	1.7	1419		CA-2050	CA-1020	CA-1020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
10	7.5	2.3	1935		CA-2050	CA-1020	CA-1020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
13	9.3	2.8	2399		CA-5020	CA-3030	CA-1020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
15	11	3.3	2838		CA-5040	CA-3030	CA-3030	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
20	15	4.5	3870			CA-5020	CA-2050	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
25	19	5.6	4773			CA-5070	CA-2050	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
30	22	6.6	5676			CA-5070	CA-2050	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
40	30	9.0	7740				CA-5030	CA-2020	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
50	37	11.1	9546				CA-5050	CA-2030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
60	45	13.5	11610				CA-5020	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
75	55	16.5	14190				CA-5030	CA-2050	CA-2020	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
100	75	22.5	19350					CA-5030	CA-2050	CA-2030	CA-2020	CA-2020	CA-2020	CA-4030	CA-4030	CA-4020	CA-4020
120	90	27.0	23220					CA-5060	CA-5030	CA-5020	CA-2030	CA-2020	CA-2020	CA-5020	CA-5040	CA-5050	CA-4030
150	110	33.0	28380						CA-5060	CA-5030	CA-5030	CA-5030	CA-5030	CA-5020	CA-5040	CA-5050	CA-5080
170	125	37.5	32250						CA-5090	CA-5050	CA-5030	CA-5030	CA-5030	CA-5020	CA-5040	CA-5050	CA-5080
180	132	39.6	34056							CA-5060	CA-5040	CA-5030	CA-5030	CA-5020	CA-5040	CA-5050	CA-5080
215	160	48.0	41280								CA-5070	CA-5050	CA-5030	CA-5040	CA-5050	CA-5050	CA-5080
240	180	54.0	46440									CA-5070	CA-5040	CA-5040	CA-5050	CA-5050	CA-5080
270	200	60.0	51600										CA-5060	CA-5040	CA-5050	CA-5050	CA-5080
300	225	67.5	58050										CA-5080	CA-5050	CA-5040	CA-5040	CA-5080
335	250	75.0	64500											CA-5070	CA-5050	CA-5050	CA-5080
425	315	94.5	81270														CA-5080


Selection Chart for Lubrication Oil Coolers based on (ISO VG 100 to ISO VG 320)*

Water Flow Rate = Oil Flow rate | Water Entering Temperature = 32°C | System Oil Temperature = 75°C

Heat Dissipation		OIL FLOW (LPM)													
kW	kcal/h	2	5	10	20	40	60	80	100	120	140	180	220	240	280
2	1720	CA-3030	CA-3030	CA-1020	CA-3030	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
5	4300		CA-5020	CA-3030	CA-3030	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
6	5160		CA-5040	CA-3040	CA-3030	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
8	6880			CA-5020	CA-3040	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
10	8600			CA-5040	CA-5020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
13	11180				CA-5020	CA-3030	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
15	12900				CA-5040	CA-5020	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
18	15480				CA-5040	CA-5020	CA-3030	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
20	17200				CA-5090	CA-5020	CA-5020	CA-2020	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
24	20640					CA-5040	CA-5020	CA-2050	CA-2020	CA-2020	CA-2020	CA-4020	CA-4020	CA-4020	CA-4020
30	25800					CA-5050	CA-5040	CA-5030	CA-2050	CA-2050	CA-2020	CA-4030	CA-4030	CA-4020	CA-4020
35	30100					CA-5070	CA-5040	CA-5030	CA-5040	CA-2050	CA-4030	CA-5080	CA-5060	CA-4030	CA-4030
40	34400					CA-5090	CA-5060	CA-5040	CA-5040	CA-5040	CA-2050	CA-5080	CA-5060	CA-5060	CA-4030
45	38700						CA-5060	CA-5040	CA-5040	CA-5040	CA-5040	CA-5080	CA-5060	CA-5060	CA-5080
50	43000						CA-5080	CA-5080	CA-5040	CA-5040	CA-5040	CA-5080	CA-5060	CA-5060	CA-5080
60	51600							CA-5090	CA-5080	CA-5040	CA-5040	CA-5080	CA-5060	CA-5060	CA-5080
80	68800										CA-5090	CA-5090	CA-5080	CA-5060	CA-5080
100	86000											CA-5080	CA-5060	CA-5060	CA-5080
120	103200												CA-5090	CA-5080	CA-5090

*Note: Safety Margin of 15-20% has been taken in the above Quick Selection Guides.

DIMENSIONS :

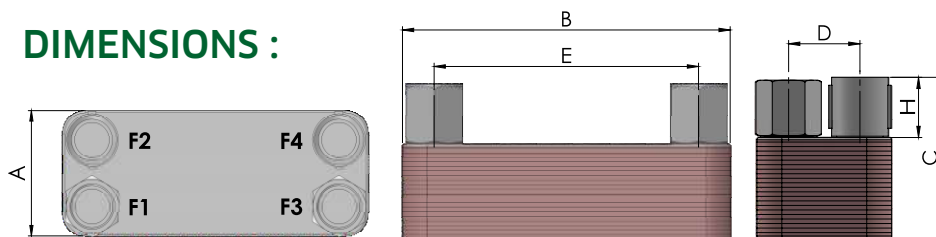

MATERIAL :


Plates : SS316
Connectors : CS / Brass / GI
Fusing : Copper

Gasket Free Plate Heat Exchanger												
Model No.	Item Code	A	B	C	D	E	Oil Side F1 & F3	Water Side F2 & F4	H	Approx. Empty Weight	Approx. Filled Weight	Approx. Fill Volume
		mm± 1	mm± 2	mm± 3%	mm± 1	mm± 1	BSP(F)	BSP(F)	mm± 2	Kg	Kg	Ltr.
CA-1020	0702-20-0.25	54.4	119.4	64.2	26	91	G 3/8"	G 3/8"	31	0.43	0.52	0.11
CA-2020	1105-20-10	119	289	110.9	72	243	G 1"	G 1"	51	4.02	5.09	1.28
CA-2030	1105-30-10	119	289	133.7	72	243	G 1"	G 1"	51	4.98	6.6	1.94
CA-2050	1105-50-10	119	289	179.4	72	243	G 1"	G 1"	51	6.9	9.66	3.30
CA-3030	1203-30-0.75	73	315	116.5	40	278	G 3/4"	G 3/4"	41.5	2.63	3.67	1.24
CA-3040	1203-40-0.75	73	315	140.5	40	278	G 3/4"	G 3/4"	41.5	3.38	4.78	1.67
CA-4020	1105-20-12.5	119	290	118.4	63	234	G 1-1/4"	G 1-1/4"	52	5.34	6.44	1.31
CA-4030	1105-30-12.5	119	290	142.3	63	234	G 1-1/4"	G 1-1/4"	52	6.54	8.22	2.01
CA-5020	2105-20-12.5	119	526	116.2	63	470	G 1-1/4"	G 1-1/4"	52	5.97	7.95	2.37
CA-5030	2105-30-12.5	119	526	139	63	470	G 1-1/4"	G 1-1/4"	52	7.91	10.92	3.60
CA-5040	2105-40-12.5	119	526	162	63	470	G 1-1/4"	G 1-1/4"	52	9.85	13.88	4.81
CA-5050	2105-50-12.5	119	526	186	63	470	G 1-1/4"	G 1-1/4"	52	11.79	16.82	6.01
CA-5060	2105-60-12.5	119	526	208	63	470	G 1-1/4"	G 1-1/4"	52	13.73	19.81	7.26
CA-5070	2105-70-12.5	119	526	222	63	470	G 1-1/4"	G 1-1/4"	52	15.67	22.78	8.49
CA-5080	2105-80-12.5	119	526	253.8	63	470	G 1-1/4"	G 1-1/4"	52	17.61	25.75	9.73
CA-5090	2105-90-12.5	119	526	276.8	63	470	G 1-1/4"	G 1-1/4"	52	19.55	28.73	10.97

Note: GFPT units are available in wide range of oil flow handling & heat dissipation capacity.
(Contact us for non stock models)

MOUNTING ARRANGEMENTS :

The GFPT units are designed for easy and flexible installation. Sturdy brackets enable secure vertical or horizontal mounting, ensuring stability and durability in operation.



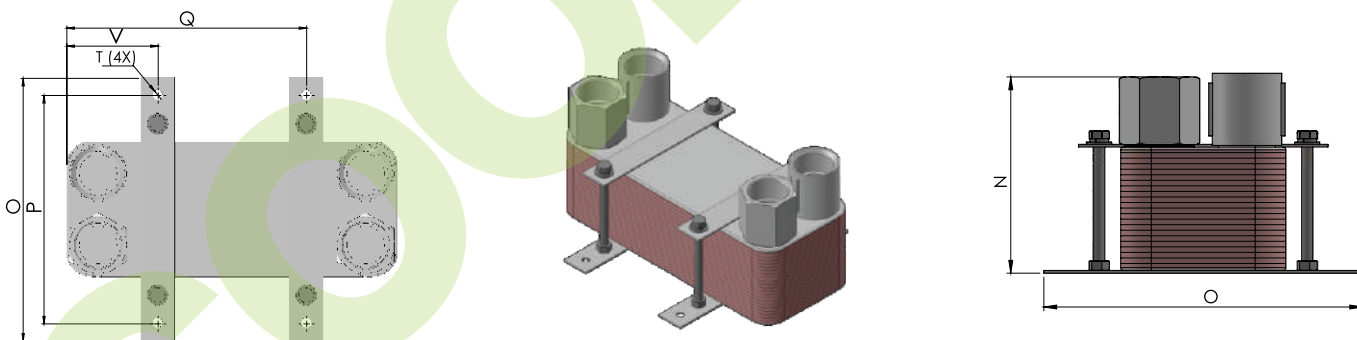


Model No.	Item Code	N mm ± 3%	O mm ± 2	P mm ± 1	Q mm ± 2	T Ø mm ± 0.5	V mm ± 2
CA-1020	0702-20-0.25	68	150	130	79.7	7	39.7
CA-2020	1105-20-10	115	220	200	209.5	9	79.5
CA-2030	1105-30-10	138	220	200	209.5	9	79.5
CA-2050	1105-50-10	184	220	200	209.5	9	79.5
CA-3030	1203-30-0.75	121	173	153	250.0	9	65.0
CA-3040	1203-40-0.75	145	173	153	250.0	9	65.0
CA-4020	1105-20-12.5	123	220	200	210.0	9	80.0
CA-4030	1105-30-12.5	146	220	200	210.0	9	80.0
CA-5020	2105-20-12.5	120	220	200	446.0	9	80.0
CA-5030	2105-30-12.5	143	220	200	446.0	9	80.0
CA-5040	2105-40-12.5	166	220	200	446.0	9	80.0
CA-5050	2105-50-12.5	190	220	200	446.0	9	80.0
CA-5060	2105-60-12.5	212	220	200	446.0	9	80.0
CA-5070	2105-70-12.5	226	220	200	446.0	9	80.0
CA-5080	2105-80-12.5	258	220	200	446.0	9	80.0
CA-5090	2105-90-12.5	281	220	200	446.0	9	80.0

ISO VG 32 HYDRAULIC OIL

Water: Oil = 1:1 | Oil Inlet Temp: 60°C | Water Inlet Temp: 30°C



PERFORMANCE GRAPHS

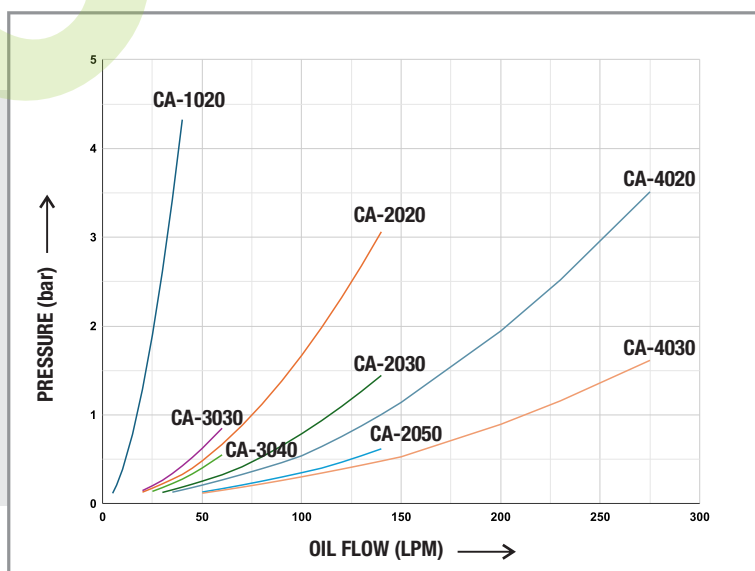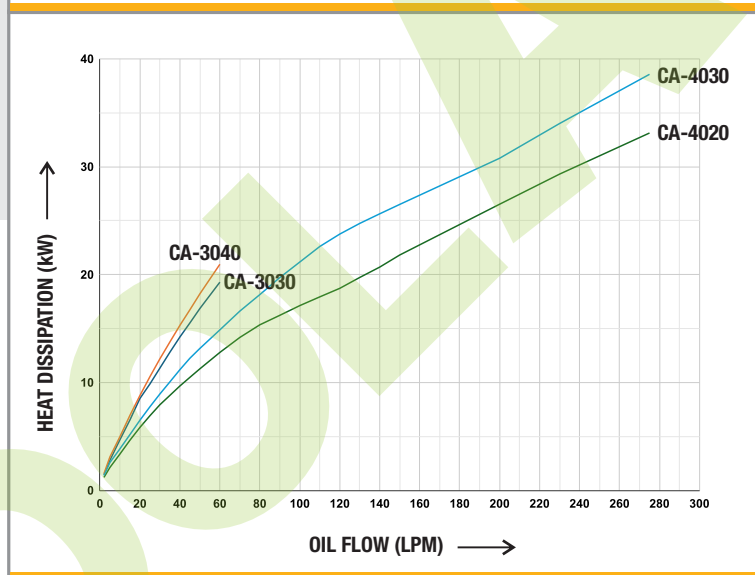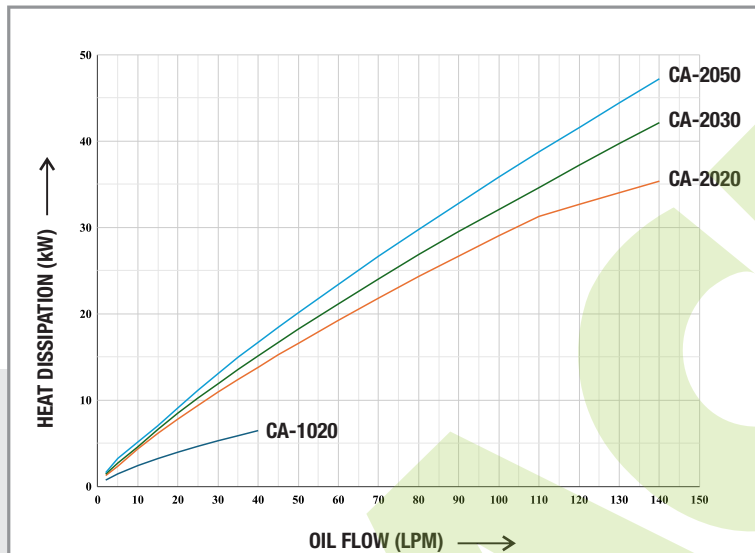


ISO VG 32 HYDRAULIC OIL

Water: Oil = 1:1 | Oil Inlet Temp: 60°C | Water Inlet Temp: 30°C

PERFORMANCE GRAPHS

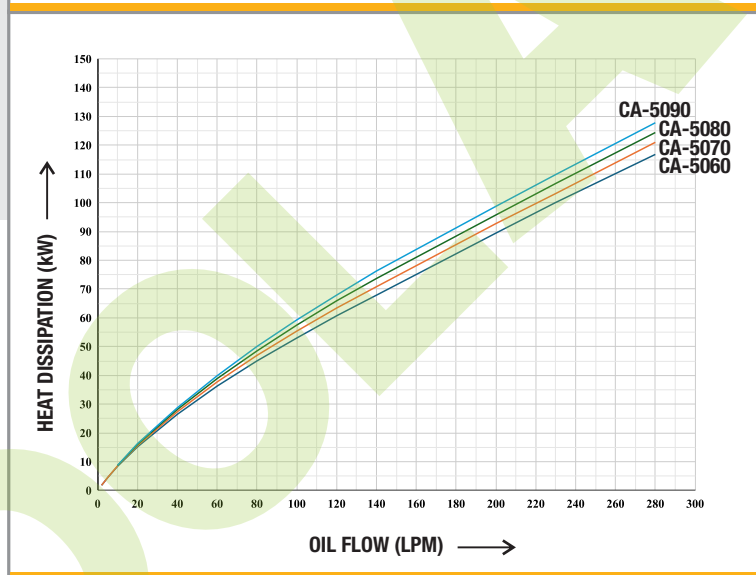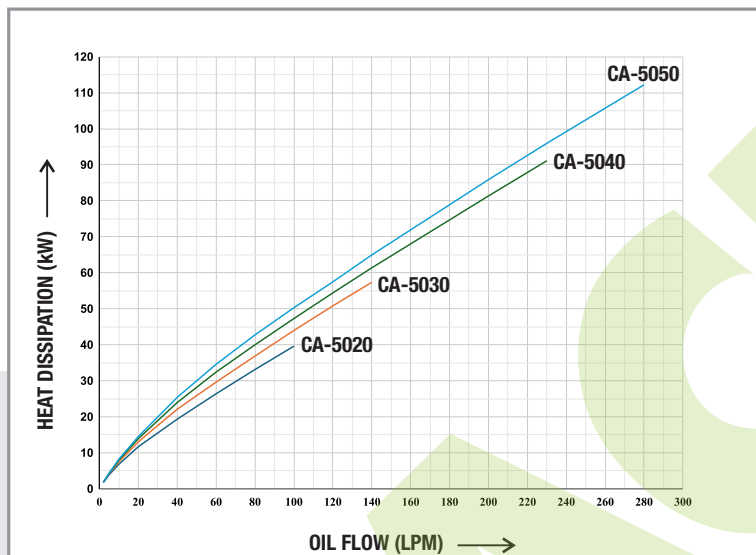




PRESSURE DROP GRAPH

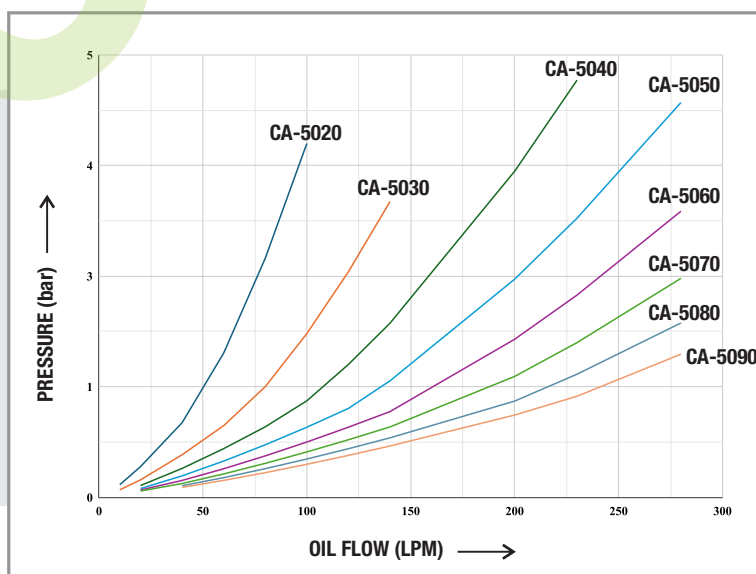

ISO VG 220 LUBRICATION OIL

Water: Oil = 1:1 | Oil Inlet Temp: 75°C | Water Inlet Temp: 30°C



PERFORMANCE GRAPHS

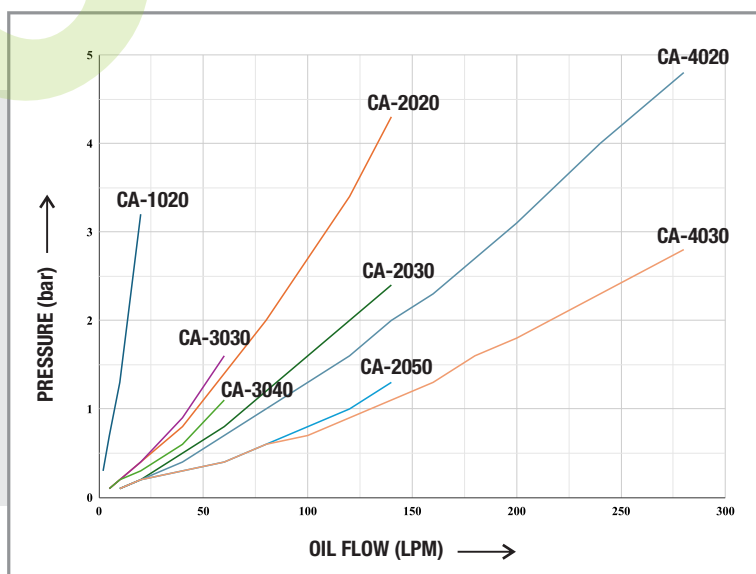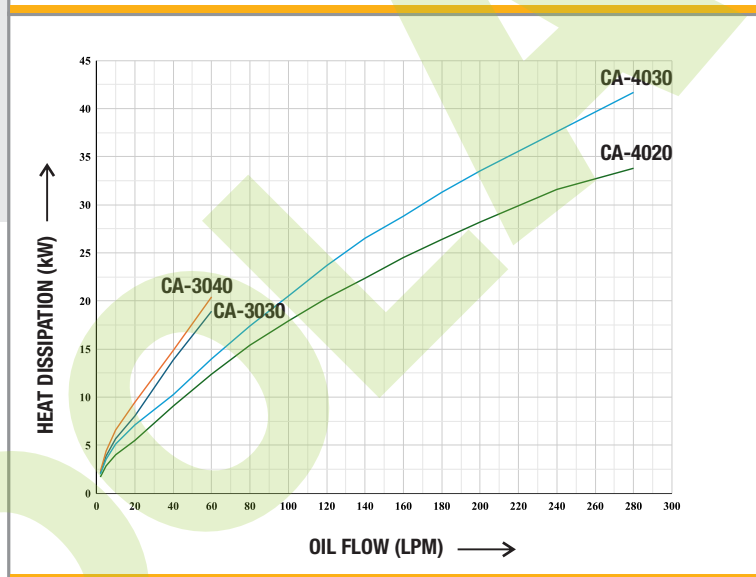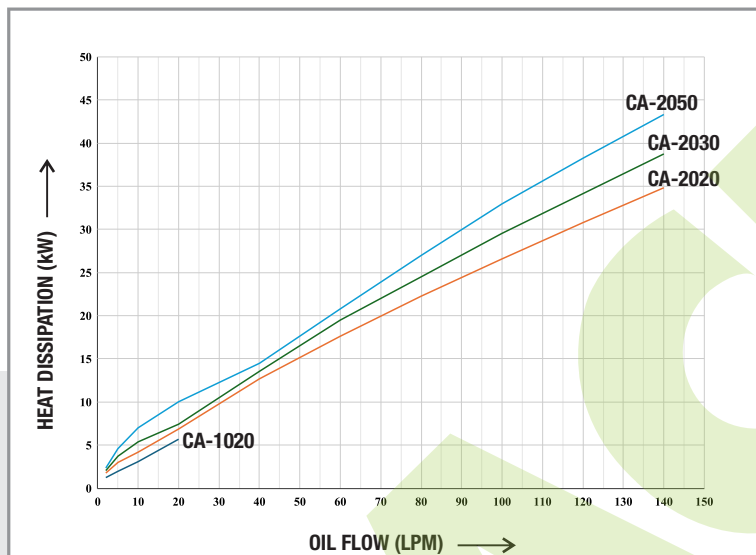


ISO VG 220 LUBRICATION OIL

Water: Oil = 1:1 | Oil Inlet Temp: 75°C | Water Inlet Temp: 30°C

PERFORMANCE GRAPHS

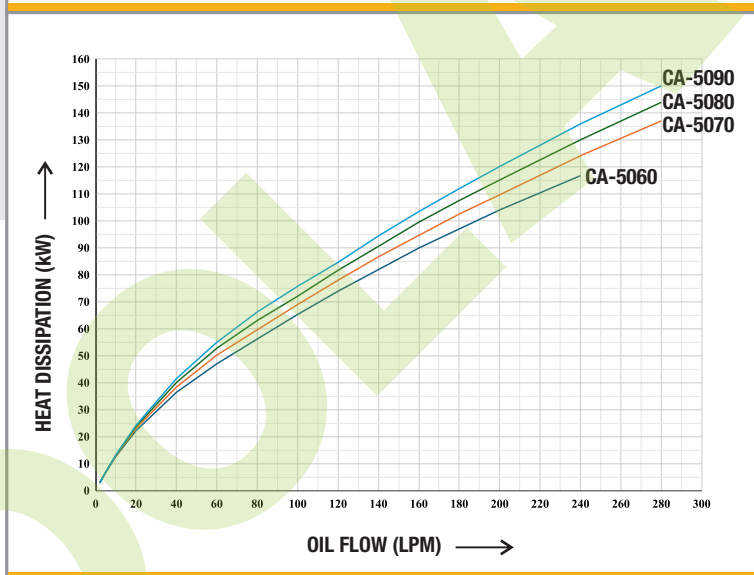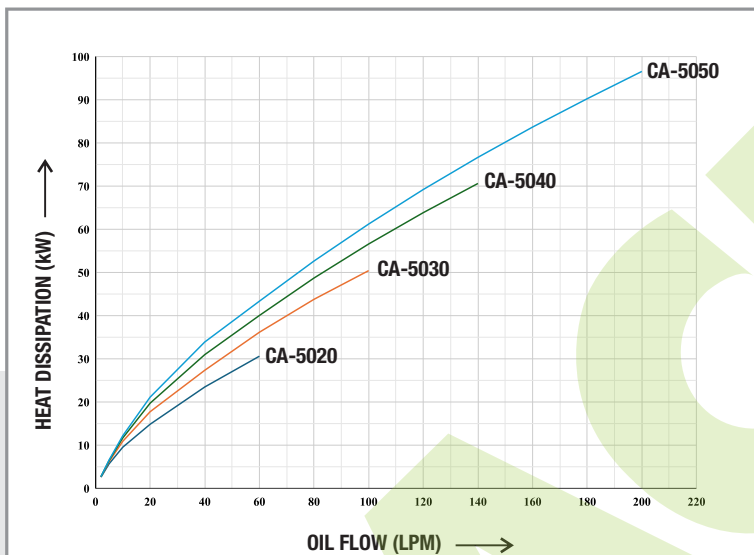

PRESSURE DROP GRAPH

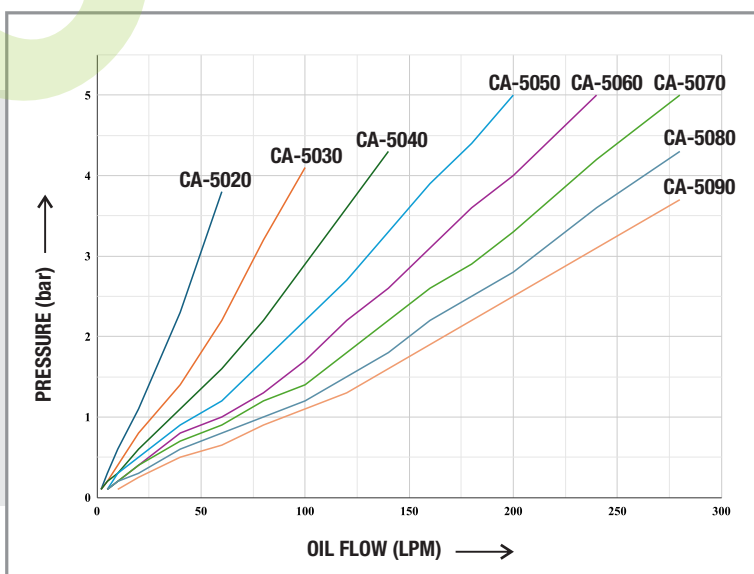

Product Portfolio



Offline Water Cooled Oil Cooling System /
LOS System



Hydraulic Cylinders



Offline Air Cooled Oil Cooling System /
LOS System



Hydraulic Power Packs /
Lubrication System



Air Cooled Oil Cooler



Oil Filtration Trolley

Industries Served



Hydraulics



Steel



Paper



Energy



Cement



Hydraulic Press



Power Generation



Mining

COOLACE

EXPORTS TO 20 COUNTRIES



OUR PRESTIGIOUS CLIENTS

 ADITYA BIRLA GROUP	 Field Logic SYSTEMS Pvt. Ltd. A FINEST TITING COMPANY OF THE BIRLA GROUP YOUR SOLUTIONS ARE OUR PASSION	 VELJAN	 Forming Tomorrow. Today!	 JK LAKSHMI CEMENT	 Continental Equipment Trading FZE (R&D, Sales, Service and Spareparts Division)
 SHAKTIMAN BIRLA INDUSTRIES PRIVATE LIMITED	 ESCORTS Agri Machinery जय किसान	 LARSEN & TOUBRO	 HERO MOTORS	 JINDAL STAR	 TOYOTA
 HIGHWOOD	 kangaro®	 KNORR-BREMSE	 BIRLA	 Rossi	 RockTek
 Escorts Kubota Limited	 RELIANCE Cement	 JINDAL STEEL & POWER	 MSN	 ESSAR STEEL	 BIGVIJAY
 Bonfiglioli	 MEWAR HI-TECH	 TECHNOMECH ENGINEERING	 सेल SAIL	 JINDAL	 Subros
 TATA STEEL BSL (Formerly known as Bhushan Steel Limited)	 Triveni ENGINEERING	 AUTO MECK An ISO 9001:2015 Company	 YUKEN Depend On us	and many more...	



COOLACE AUTOMATION ENGINEERS PVT. LTD.

C-164, Mayapuri Industrial Area, Phase 2, New Delhi-110064, India



+91 9871933316, +91 7428279116



sales3@acefluidpower.com, oilcoolers@acefluidpower.com