


Pilot Operated Pressure Reducing Valve

Pilot-operated, Pressure reducing valve reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, Allowing circuits with multiple pressure requirements to be operated using a single pump.

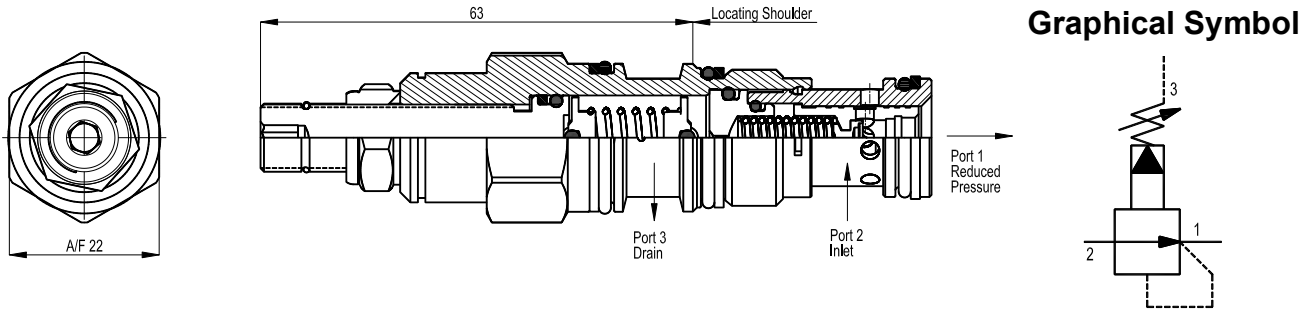

Specifications



Model Number	Rated Flow L/min.	Max. Operating Pressure Kgf/cm ²	Pressure Adj. Range Kgf/cm ²	Mass Kg.
RVC40-AN	40	350	5-140	0.3

Model Number Designation

RVC	40	-A	N
Series Number	Valve Size	Pressure Adj. Range Kgf/cm ²	Seal Material
RVC: Cartridge Pilot-Opt. Pressure Reducing Valve	40	A : 7-210 B : 3.5-105 W : 10-315	N : Nitrile V : Viton




Performance Curve

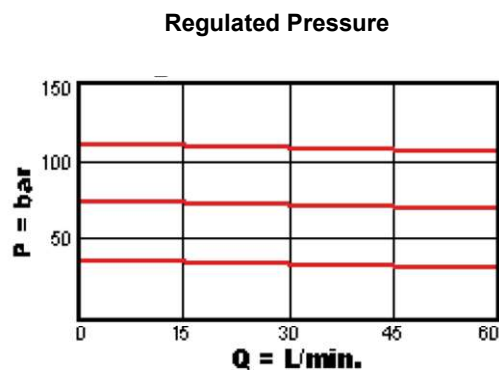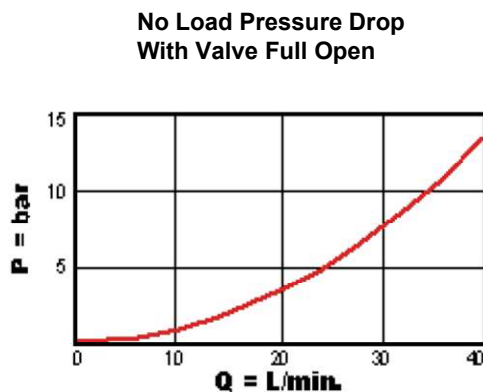

■ Cavity Details

DIMENSIONS IN
MILLIMETRES

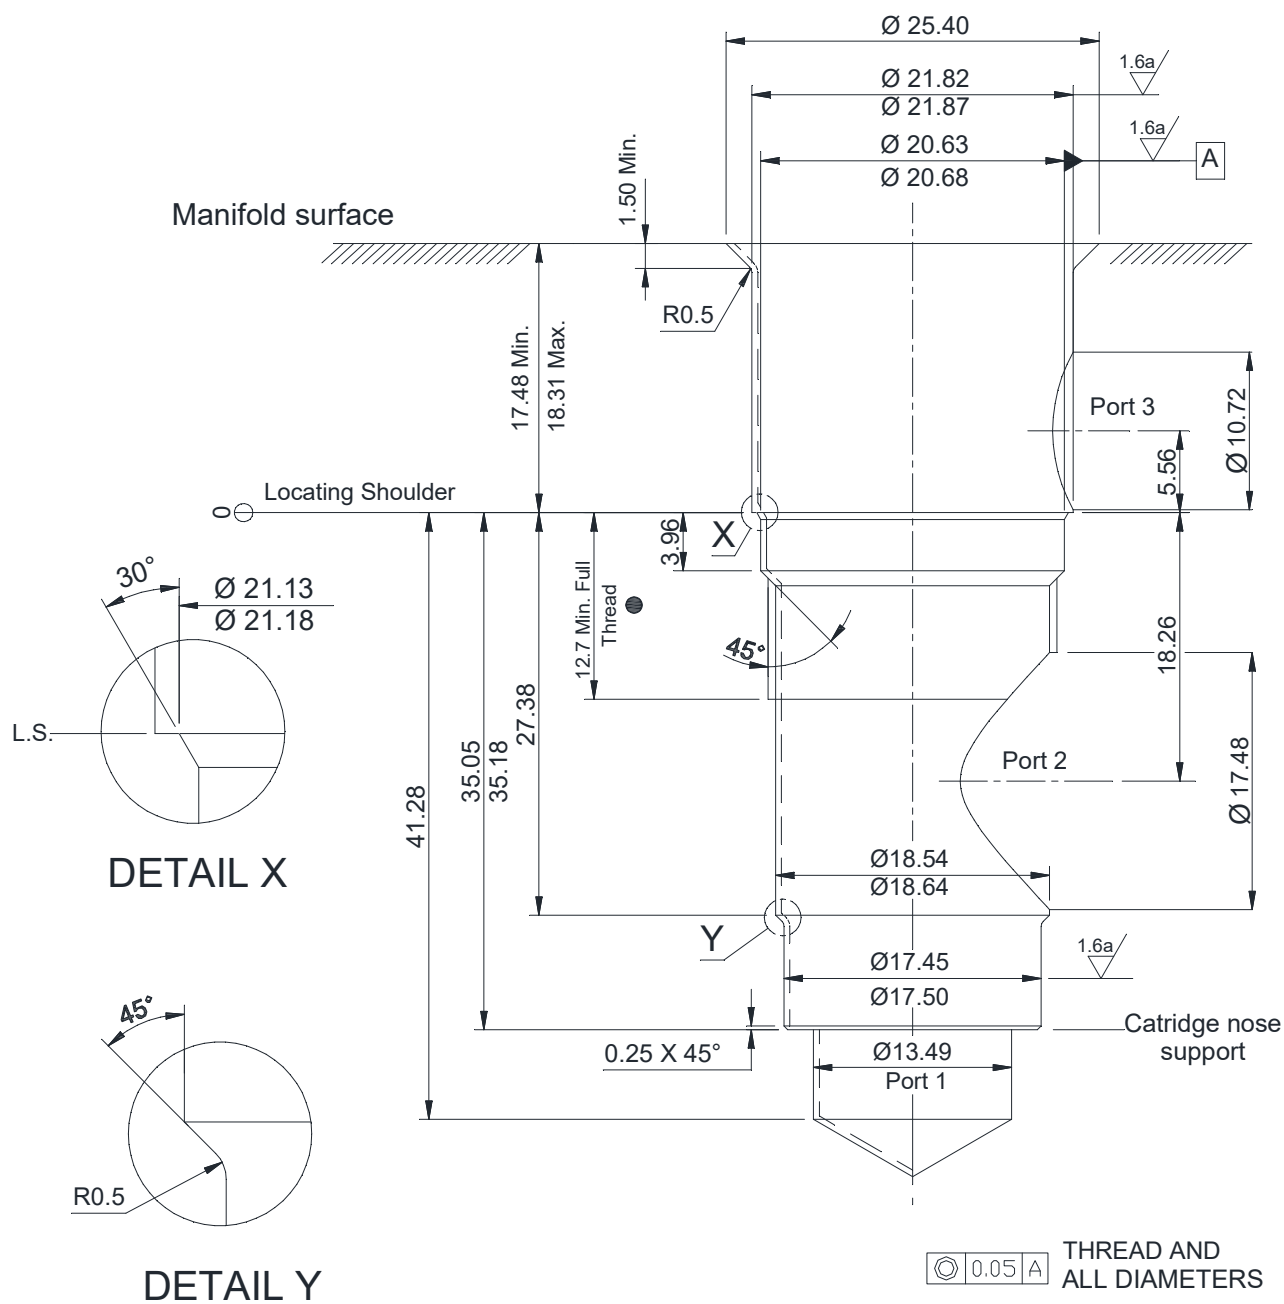

● M20X1.5 - 6H ISO (METRIC) THREAD
19.026/19.216 PITCH DIA

Pilot Operated Pressure Reducing Valve